

## RESUFLOR™ TOPCOAT SDU EV


Resuflor Topcoat SDU EV is a unique epoxy resin based coating system with a static dissipative urethane topcoat. The system provides a highly durable satin finish with high chemical resistance. Specifically designed for battery manufacturing plants due to its combination of ESD performance and 7 day NMP resistance. Also well suited to use in laboratories, cleanrooms, electronics manufacturing and many other areas requiring ESD performance.

### BENEFITS

- 7 day resistance to N Methyl-2-Pyrolidone (NMP)
- 14 day resistance to Dimethyl Carbonate (DMC)
- High chemical resistance
- Electro-Static Dissipative (ESD)
- Lightly textured profile reduces slip potential
- Includes moisture vapour barrier for fast installation and ideal for dryrooms
- Easy to clean off carbon black and graphite
- Durable finish
- Satin finish
- UV stable


### USES

- Battery manufacturing
- Battery recycling
- Cleanrooms/Dryrooms
- Chemical plants
- Pharmaceutical
- Laboratories
- Automotive manufacturing
- Heavy manufacturing
- Aerospace manufacturing
- Electronics manufacturing
- Semiconductor manufacturing

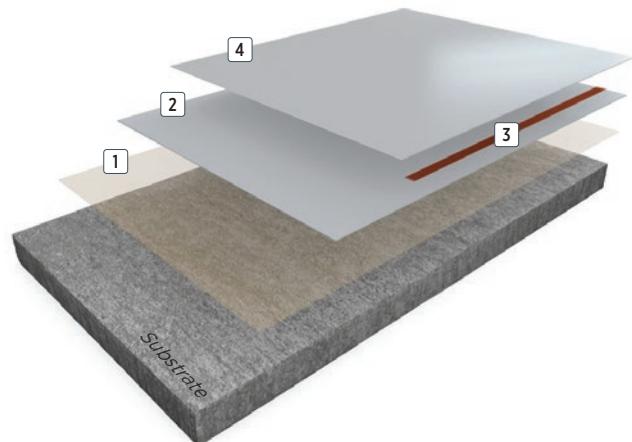

- ④ Topcoat: **Resutile™ SDS**
- ③ Earthing: **Copper tape tail**
- ② Base coat: **Resuflor HB**
- ① Primer: **Resuprime™ MVT**

1mm

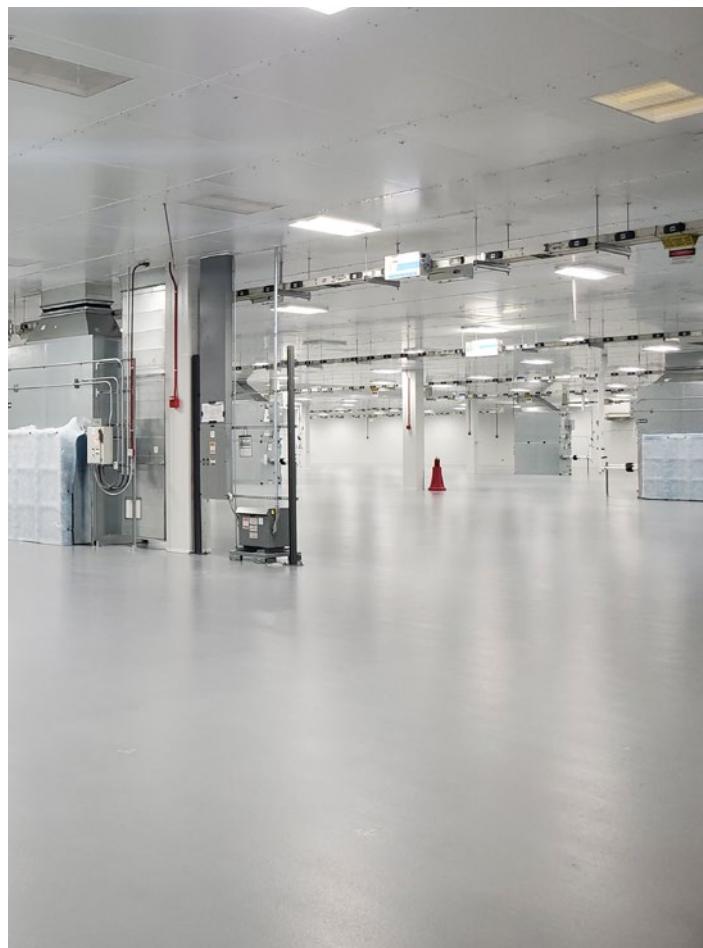

**FEATURED COLOURS**



Canada Grey



Light Grey



Black



Sandy Beige




Rich Green



Regal Blue



Rotunda Red



White



Bright Yellow



Steel Grey



Charcoal



Tile Red

\* Also available in **Safety Red** and **Safety Yellow**.

This reproduction approximates the actual colour. Factors such as the type of product, degree of gloss, texture, size and shape of area, lighting, heat, or method of application may cause colour variance. Substituting other manufacturers' colours may not be representative of our blends. Contact your Sherwin-Williams representative for details.

**SYSTEM COMPOSITION**

Coat	Product options	Theoretical consumption kg/m <sup>2</sup>	Application
Primer	Resuprime™ MVT	0.5	Squeegee/Roller
Build coat	Resuflor HB	0.5	Squeegee/Roller
Earthing	Copper tape tail		
Topcoat	Resutile™ SDS	0.1	Roller
<b>Approximate thickness: 1mm</b>			

**TYPICAL CURE TIMES**

Temperature	10°C	20°C	30°C
Foot traffic	24 hrs	24 hrs	24 hrs
Full traffic	48 hrs	48 hrs	48 hrs
Full chemical cure	14 days	14 days	14 days

**CHEMICAL RESISTANCE**

Chemical	1 days exposure	7 days exposure	14 days exposure
N-Methyl-2-Pyrrolidone (NMP)	No change	No change	
Dimethyl Carbonate	No change	Slight discolouration	Slight discolouration
Carbon black	No change	No change	
Graphite	No change	No change	
Hydrochloric Acid 10%	No change	No change	
Nitric Acid 10%	No change	No change	
Sulfuric acid 37% (battery acid)	No change	No change	
Ethylene Glycol (antifreeze)	No change	No change	
Skydrol	No change	No change	
Sodium chloride 20%	No change	No change	

**TYPICAL PHYSICAL PROPERTIES**

Abrasion resistance	ASTM D4060	CS-17 wheel, 1000gm load, 1000 cycles – 38 mg loss
Compressive strength	BS EN ISO 604:2003	9.6 MPa
Tensile strength	BS EN ISO 527 - 2:2012	3.6 MPa
Flexural strength	ISO 178:2010	3.2 N/mm <sup>2</sup>
Bond strength	BS EN I3892 - 8:2002	>3 N/mm <sup>2</sup> (substrate failure)
Impact resistance	BS EN 1504-2:2004	Class II
Temperature resistance		Temperatures up to 60°C
Chemical resistance		Excellent
Reaction to fire	BS EN 13501 - 1:2018	B <sub>fl</sub> – s1
Resistance to ground	BS EN 61340-4-5:2018	R <sub>g</sub> < 1 x 10 <sup>9</sup> Ω & absolute value of body voltage 100 V
Slip resistance	BS EN 16165:2021	Wet 15, Dry 89

**THE SHERWIN-WILLIAMS DIFFERENCE**

Sherwin-Williams High Performance Flooring delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe.

[resinflooring.sherwin.eu](http://resinflooring.sherwin.eu)

**FIND YOUR  
LOCAL CONTACT**

